

Rainforest 96

Steam Shower Room



Installation Manual

Parts List



Part # 1



Part # 2



Part # 3



Part # 4



Part # 5



Part # 6



Part # 7



Part # 8



Part # 9



Part # 10



Part # 11



Part # 12



Part # 13



Part # 14



Part # 15



Part # 16



Part # 17



Part # 18



Part # 19



Part # 20



Part # 21



Part # 22



Part # 23



Part # 24



Part # 25



Part # 26



Part # 27




Part # 28



Part # 29



Part # 30



Part # 31



Part # 32



Part # 33



Part # 34



Part # 35

Whirlpool Bath Installation

Fit the electrical sockets to install the hot/cold water inlet pipe and the waste outlet pipe.

See Figure 1 (There is one for the two water pumps 750 Watts*2 and one for the steam generator 3KW)

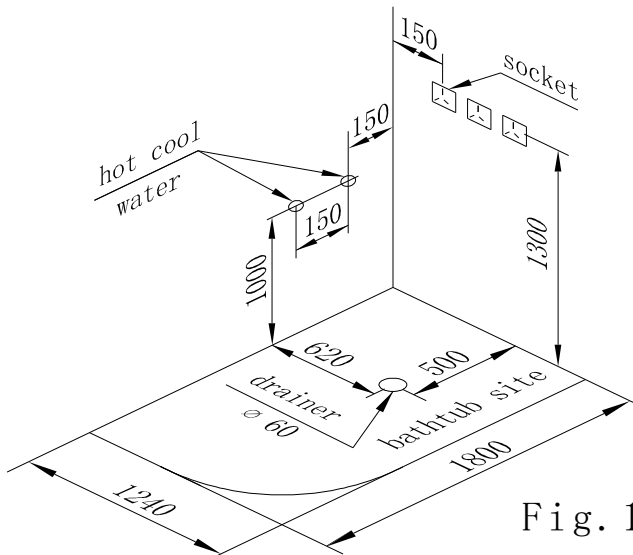


Fig. 1

Installation Steps

Step 1



Check the level gauge on each three positions. If the level gauge is not level then adjust the whirlpool bath tub leg(s) accordingly.

Step 2



Connect the drainage pipe (35mm) to the waste outlet. (We recommend you use a compression fitting to adapt to 50mm or 60mm solvent weld waste.)

Step 3



Install the middle aluminum door frame poles using screw size ST4*16 (Part # 6).

Step 4



Install the two side temper glass doors and the middle aluminum pole using screw ST4*16 (Part # 6).

Step 5




Install the temper glass sliding doors using the sliding wheels (Part # 14).

Step 6



Install the magnetic door bar. If the magnetic bar is longer than the temper glass door just cut it with a cutting tool. (Part # 31)

Step 7

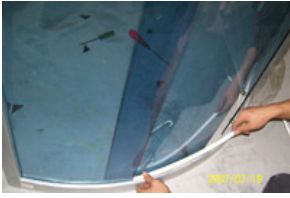

Attach the sliding door frame using the glue bar (Part # 16)

Step 8



Install the door frame on the tub.

Step 9



Use screw size ST4*25 (part # 11) to secure the door frame.

Step 10



Adhere the glue bar to the black temper glass on the top and bottom side. Use the “H” shape glue bar (Part # 25).

Step 11



Install shampoo rack, towel rack, showerhead handle, foot massage connection ball, etc. using part #4, # 18, #22, # 23, # 24, # 34 and # 35.

Step 12



Install the black back side temper glass wall using screw size M5*25 (Part # 1, # 3 and # 9).

Step 13



Use screw size M6*25 (Part # 1, # 2 and # 10) to attach all back side walls to the tub.

Step 14



Install the middle acrylic wall using screw size M6*25 (Part # 1, # 2 and # 10).

Step 15



Install the shower top. If the shower you ordered is MP3 compatible, then place the wires outside the top back-side shower wall.

Step 16



Attach all back-side to shower top using screw size M6*25 (Part # 1, # 2 and # 10).

Step 17



Attach the top aluminum frame to the top shower cover using screw size M4*25 (Part # 7).

Step 18



Take off all the connection wirings and get ready for the connection.

Step 19




Connect the electromagnetism value, audio & radio, and LCD TV power.

Step 20



Connect Fluorescent Mood Lighting lights.

Step 21

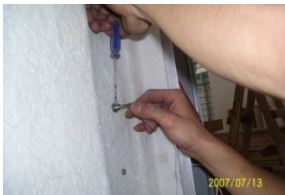

Connect the plug to the power box and then connect the temperature sensor to the appointed place.

Step 22



Connect the top side USB port to the power box side USB port.

Step 23



Connect the fan, speaker, and ozone on top of the shower.

Step 24



Connect the water pipes. There are two connections on the shower top for the two movable showerheads. Also connect the shower head at this time.

Step 25



Connect the cold water pipe to the steam generator.

Step 26



Take off the steam pipe from the steam generator and then connect to the steam spout. Please remember to put on a glue gasket before you connect to the steam spout. Use Part # 5 the black gasket.

Step 27



Attach movable shower poles using Part # 21 and # 32.

Step 28



Connect the foot massage using Part # 17, #19, and # 20.

Step 29



Connect the door handle using Part # 12.

Step 30



While standing inside the shower room, place plastic strips (Part # 26) on all glass sides to attach. Please remember all sides between the glass and aluminum poles.

Step 31



Put on some industrial strength glass glue. (Note: My Bath does not supply glass glue. You will need to purchase the glass glue at a local material and construction shop.)

Step 32



Attach the grey pillow, which is Part # 30.

Step 33



Attach the showerheads using Part # 29.

Step 34



Install the LCD TV set onto the tub. Please remember to put some glass glue to attach it. Then, connect the wires to the main control panel and the main power box. Use Part # 33 the 8.4inch LCD TV set.

Step 35



Place on the drain cover using Part # 15.

Final Step



Check the LCD TV remote control. Before leaving the factory, the battery was uninstalled so before you use the shower it's necessary to check if the battery was inside the remote controller or not.

Regular Maintenance

1. Please keep the whirlpool bathtub clean. Regularly unscrew the drain outlet cover to clean up hair and debris to prevent the drainage pipeline from backing up. Before each use, wash the pipeline once with the branch water first.
2. You can clean the unit with liquid detergent using a soft cloth. Please do not use strong chemicals such as acid, alkali, etc. as these will damage the surface. Electroplate parts such as spray nozzle should not remain in detergent, otherwise the surface will develop green spots.
3. The bathtub surface will scale so scrub it with a soft cloth using a little citric acid or water with alcohol added.
4. Be aware, hard metal objects such as a screw will injure the basin surface.
5. If you have a scotch or cigarette burn on the surface, carefully polish with a waterproof abrasive paper (No. 1200). If this doesn't work, use No. 2000 waterproof abrasive paper. Then use polishing lotion (automobile polishing wax or toothpaste) with a soft cloth to polish resuming smooth surface. Please don't use this method to polish the bottom of bathtub.
6. If
there is some foreign matter on the walls or the pillars, do not brush with a razor blade or metal brush. You can use the soft cloth with sanitizer to scrub off.