



FRONT VIEW

SIDE VIEW

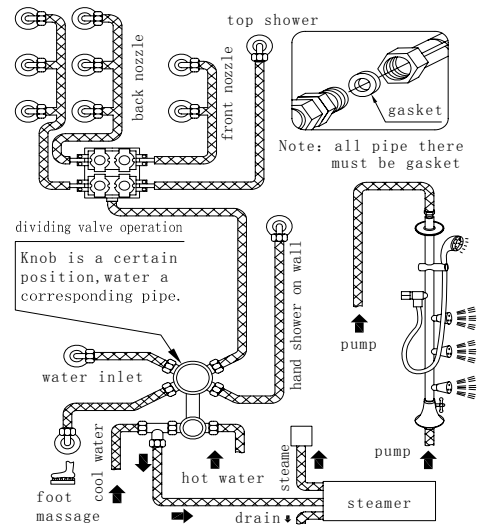

BACK SIDE WATER CONNECTION WAY

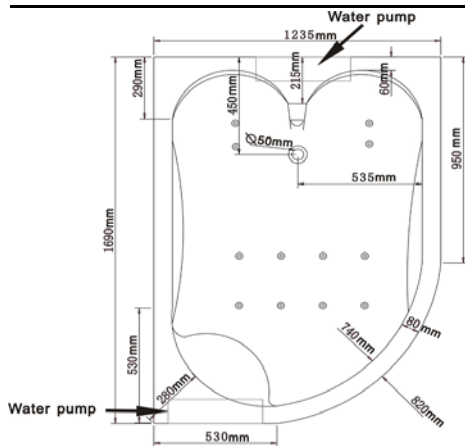

WHIRLPOOL BATH VIEW

Gallon per Minute

Drain Water	10.6 US gal.	40.1 Liters/min.
Tap Water In	3.18 US gal.	12 Liters/min.
Top Showerhead	3.18 US gal.	12 Liters/min.
Movable Hand Showerhead	3.18 US gal.	12 Liters/min.
Back-wall body Jets	2.7 US gal.	10.22 Liters/min.
Whirlpool big Massage Jets	70.45 US gal.	266.65 Liters/min.
Whirlpool Bubble Bath Jets	46.23 US gal.	175 Liters/min.

Technical Specifications

Products Dimension

L1700 x D1300 x H2250mm
(L67" x D51.2" x H88.58")

Products Weight

Box A: 74 KGS (163 lb)
Box B: 120 KGS (264 lb)

Shipping Weight

Box A: 100 KGS (220 lb)
Box B: 143 KGS (315 lb)

Package Dimension

Box A: 1670 x 1670 x 890mm (65.75"x65.75"x35")
Box B: 1630 x 950 x 620mm (64.17"x37.4"x24.4")

Electrical Specifications

2 Water pumps:1460W/110V/60Hz/13.3A
Steam Generator: 3000W/110V/60Hz/27A
Heater pump(Optional):1500W/110V/60Hz/13.6A

Number of Jets

10 body massage jets
12 whirlpool bubble bath jets
6 big whirlpool massage jets

Whirlpool Water Capacity

300~450 Litters (79.3~118.9 US gal.)

Minimum Working Water Pressure

4.0 bar (57.14 psi)

Maximum Working Water Pressure

8.0 bar (114.29 psi)

Recommended Working Water Pressure

6.0 bar (85.72 psi)

Minimum Working Water Temperature

5° C (41° F)

Maximum Working Water Temperature

60° C (140° F)

Minimum Working Water Temperature

37° C (98° F)

Size of drainage pipe

φ 35mm (1.38")

MP3/MP4 compatible (Optional)