



FRONT VIEW

SIDE VIEW

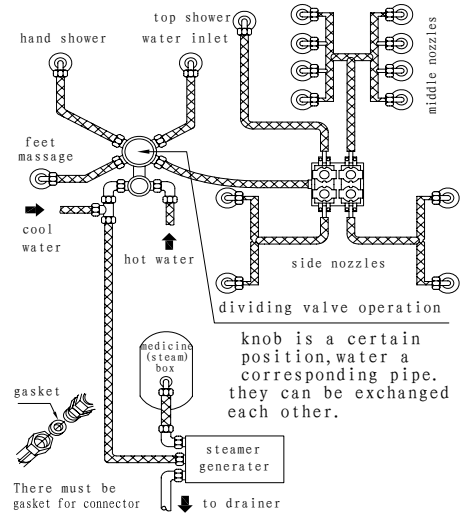

BACK SIDE WATER CONNECTION WAY

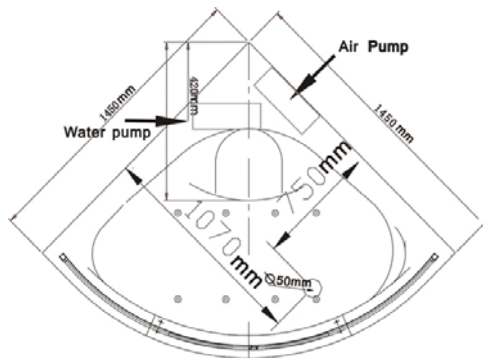

WHIRLPOOL BATH VIEW

Gallon per Minute

Drain Water	8.98 US gal.	34 Liters/min.
Tap Water In	3.18 US gal.	12 Liters/min.
Top Showerhead	3.18 US gal.	12 Liters/min.
Movable Hand Showerhead	3.18 US gal.	12 Liters/min.
Back-wall body Jets	8.08 US gal.	30.6 Liters/min.
Whirlpool big Massage Jets	70.45 US gal.	266.65 Liters/min.
Whirlpool Bubble Bath Jets	4.76 US gal.	18 Liters/min.

Technical Specifications

Products Dimension

L1450 x W1450 x H2200mm
(L57" x W57" x H86.6")

Products Weight

Box A: 108 KGS (238 lb)
Box B: 82 KGS (180 lb)

Shipping Weight

Box A: 149 KGS (328 lb)
Box B: 122 KGS (268 lb)

Package Dimension

Box A: 1560 x 1560 x 710mm (61.4"x61.4"x27.8")
Box B: 1570 x 870 x 420mm (61.8"x34.3"x16.5")

Electrical Specifications

Water pump & air pump: 1100W/110V/60Hz/10A
Steam Generator: 3000W/110V/60Hz/27.3A
Heater pump (Optional): 1500W/110V/60Hz/13.6A

Number of Jets

10 body massage jets
8 whirlpool bubble bath jets
6 big whirlpool massage jets

Whirlpool Water Capacity

290~420 Litter (76.6~111 US gal.)

Minimum Working Water Pressure

4.0 bar (57.14 psi)

Maximum Working Water Pressure

8.0 bar (114.29 psi)

Recommended Working Water Pressure

6.0 bar (85.72 psi)

Minimum Working Water Temperature

5° C (41° F)

Maximum Working Water Temperature

60° C (140° F)

Minimum Working Water Temperature

37° C (98° F)

Size of drainage pipe

φ 35mm (1.38")

MP3/MP4 compatible (Optional)